

CAPTAIN

Stylish and connected



SÉCURLITE
DURABLE LIGHT

DESIGNED AND MADE IN FRANCE
SINCE 1986



CAPTAIN

The Connected era's first LED luminaire for communal areas.



CAPTAIN is a new luminaire, born out of an eco-design policy, that offers innovative functions for lighting in hallways and circulation areas.

So much more than just a standard bulkhead fitting, CAPTAIN's elegant design, environmental characteristics, and remote management make it your perfect partner for managing your lighting installations in an efficient, environmentally-friendly way.



Design: PM Design.

ECO-DESIGNED:


Manufactured from recycled and recyclable plastics and factory-repairable, the Captain luminaire is reusable in an overall maintenance circuit and forms part of a circular economy policy aimed at extending useful life.

It is fitted with a high-performance, repairable LED system, with up to 2750 lm output and very low consumption of 130 lm/W, and lumen maintenance more than 72,000 hours in L80B10.

ONE-CLICK INSTALLATION:

Thanks to its plug-in mount, fixing and electrical connection can be performed during building work with no fear of damaging the luminaire itself. The luminaire can then be locked onto its mount with a single click at the end of the project, saving precious time in both installation and maintenance.

Innovative, elegant appearance with no visible screws!

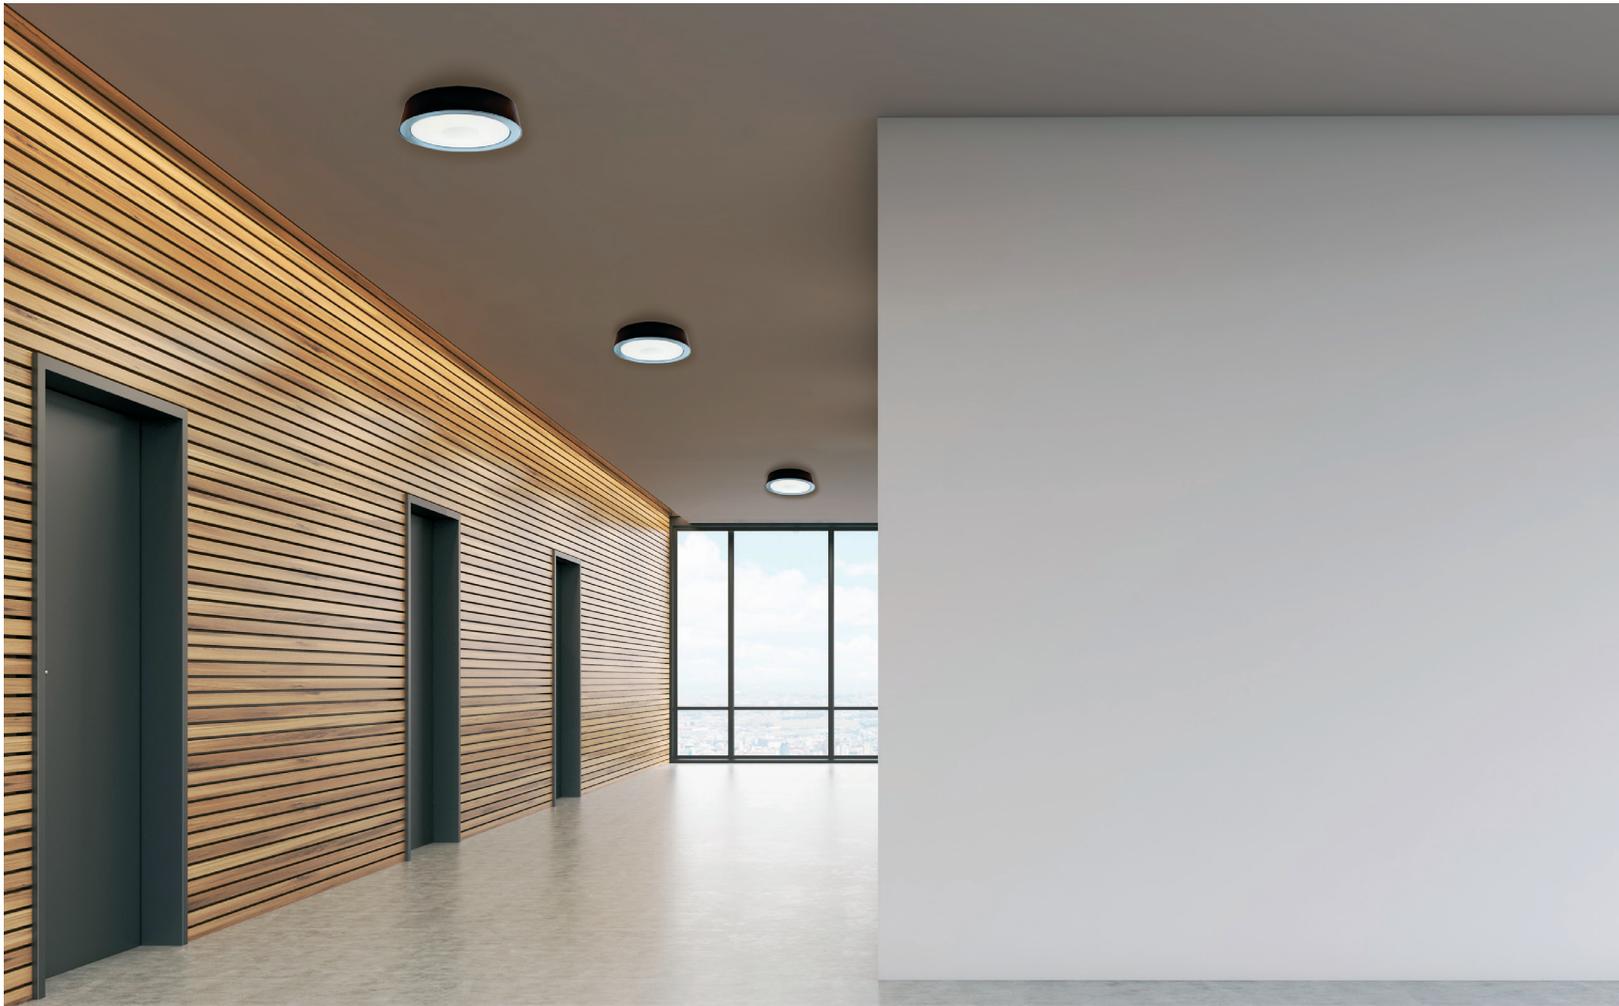

And because everyone is concerned for the environment, its light unit can be dismantled and repaired, without needing to replace the luminaire as a whole. This extends its useful life and allows technical evolution.



Its recycled polycarbonate mount is part of a circular economy policy, and its reinforced construction offering IK10 impact resistance, protected by an invisible secure closure, make this a very durable luminaire.



Its LED module, its detector, and its communication system are designed, developed, and manufactured in France and carry the Origine France Garantie label – the only quality mark that truly guarantees local manufacturing and that our suppliers and subcontractors too are in France..



CAPTAIN, like all new SECURLITE products, has been certified Origine France Garantie by an external control office, thus attesting to the French manufacture of the product.

CAPTAIN





FEATURES

- Low-consumption architectural luminaire
- Mount, base, bezel made from recycled polycarbonate
- High-performance polycarbonate diffuser
- Captive, non-visible stainless steel vandal-resistant fixings
- Standby consumption: Captain consumes less than 0.5 W in standby
- Lumen maintenance: L80B10 / over 72,000 hours

OPTIONS AVAILABLE ON REQUEST

- LED 3000 K
-  Vandal-resistant tool (bit) to be ordered separately code: 9800 0003

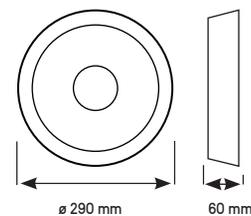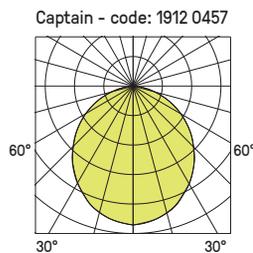

CAPTAIN on / off version

220-240 V AC /50/60 Hz



 direct 190

Designation	Power (W)	Luminaire light output (lm) 4000 K	Luminaire efficacy (lm/W)	○ Code RAL9003	● Code* RAL7035	● Code* RAL9005
Captain 2000	11	1550	141	1901 0400	1901 1400	1901 2400
Captain 2600	15	1950	130	1902 0400	1902 1400	1902 2400
Captain 3600	21	2750	131	1903 0400	1903 1400	1903 2400

*RAL7035 and RAL9005: for power, light output, and efficacy information, please refer to data sheet.

Colour temperature coding 3000K: replace number 4 with number 3 **example** 1901 04-- 4000 K COLOUR
1901 03-- 3000 K COLOUR

CAPTAIN Dali version

220-240 V AC /50/60 Hz



RoHS

direct 190

Designation	Power (W)	Luminaire light output (lm) 4000 K	Luminaire efficacy (lm/W)	○ Code RAL9003	● Code* RAL7035	● Code* RAL9005
Captain 2000	12	1550	129	1901 0420	1901 1420	1901 2420
Captain 2600	15	1950	130	1902 0420	1902 1420	1902 2420
Captain 3600	21	2750	131	1903 0420	1903 1420	1903 2420

CAPTAIN connected version with detection

220-240 V AC /50/60 Hz



RoHS

direct 190

Designation	Power (W)	Luminaire efficacy (lm) 4000 K	Luminaire efficacy (lm/W)	○ Code RAL9003	● Code* RAL7035	● Code* RAL9005
Captain 2000	12	1550	129	1911 0457	1911 1457	1911 2457
Captain 2600	15	1950	130	1912 0457	1912 1457	1912 2457
Captain 3600	22	2750	125	1913 0457	1913 1457	1913 2457

*RAL7035 and RAL9005: for power, light output, and efficacy information, please refer to data sheet.

Colour temperature coding 3000K: replace number 4 with number 3

example 1901 04-- 4000 K COLOUR
1901 03-- 3000 K COLOUR

CAPTAIN connected version slave


220-240 V AC /50/60 Hz



RoHS

direct 190

Designation	Power (W)	Luminaire efficacy (lm) 4000 K	Luminaire efficacy (lm/W)	○ Code RAL9003	● Code* RAL7035	● Code* RAL9005
Captain 2000	12	1550	129	1911 0453	1911 1453	1911 2453
Captain 2600	15	1950	130	1912 0453	1912 1453	1912 2453
Captain 3600	22	2750	125	1913 0453	1913 1453	1913 2453

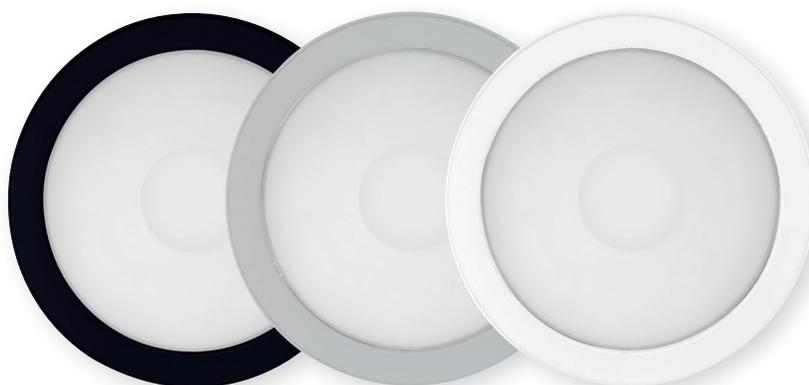

Designation	Power (W)	Luminaire light output (lm) 4000 K	Luminaire efficacy (lm/W)	○ Code RAL9003	● Code* RAL7035	● Code* RAL9005
Captain 2000	12	1550	129	1911 0455	1911 1455	1911 2455
Captain 2600	15	1950	130	1912 0455	1912 1455	1912 2455
Captain 3600	22	2750	125	1913 0455	1913 1455	1913 2455


FEATURES TABLE

	Variante	On/Off luminaire	Slave connected luminaire (1)	Connected luminaire with twilight photocell (1)	Connected luminaire with detection (1)	DALI luminaire
Available for sale Available for rental	On-off	✓	✓	✓	✓	✓
	Extinction warning		✓	✓	✓	✓ ⁽²⁾
	Motion detection				✓	
	Twilight switching			✓	✓	
	DALI					✓ ⁽²⁾
	Switch-Dim		✓	✓	✓	
	Daisy-chaining		✓	✓	✓	✓ ⁽²⁾
	Remote-control mode for simple settings via smartphone/tablet applications			✓	✓	✓

1 Setting by smartphone via the Lumicare
 2 Only possible via DALI control





SÉCURLITE
DURABLE LIGHT

Z.I. DES AJEUX
72400 LA FERTÉ-BERNARD

FRANCE

+33 2 43 60 40 00
EXPORT@SECURLITE.COM
WWW.SECURLITE.COM



Securlite is committed to the fight for sustainable development.

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.
Terms and conditions are available at: www.securlite.com/terms or upon request from our Sales Department.

Photo credits: Securlite



Printed on PEFC paper, guaranteeing a sustainably-managed forest.
(Program for the Endorsement of Forest Certification)