



- › Miniature spotlight for effect illumination
- › Very low energy consumption
- › Can be swivelled by 180°






4.0011.15 | SURFACE-MOUNTED SPOTLIGHT

FOR ILLUMINATION OF SMALL FOUNTAINS, WATERGAMES AND EXTERIOR AREAS.




- Protection system IP68 – for a water depth of up to 3 m
- Entirely made of stainless steel 316Ti 1.4571
- Mounting foot adjustable through 180°
- ...
- POW-LED cold white, warm white, neutral white
- POW-LED colored
- Multichip POW-LED RGB
- operating mode: constant current
- Rotationally symmetric light distribution
- ...
- Cable pressure sleeve, V4A stainless steel
- Temperature-resistant silicon seal
- Toughened safety glass
- Supplied with UW-cable (3 m) already connected

+ ADDITIONAL PARTS




spike
150 mm
4.0011.50.00



Anti-glare ring
Stainless steel 316Ti, ø 40 mm, length 50 mm
9.0011.00.70

★ PRODUCT LINE

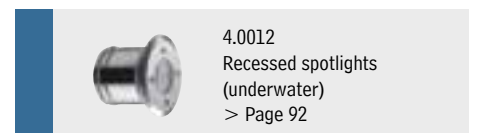




SURFACE SPOTLIGHT 4.0011.15

UNDERWATER | EXTERIOR

IP68



Anti-glare ring

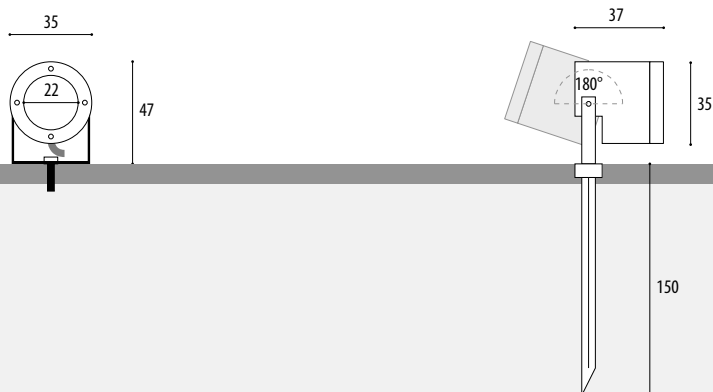

Article number	Lamps	Lumen	Light colour	Wattage	Current	Radiation angle	Cable, installs	[V]
VERSIONS: UNDER- AND OVERWATER OPERATION (ACCORDING TO PRIOR AGREEMENT)								
4.0011.15.01	1 POW-LED	165 lm	6000K cold white	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	V12
4.0011.15.02	1 POW-LED	135 lm	3000K warm white	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	
4.0011.15.03	1 POW-LED	155 lm	4500K neutral white	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	
4.0011.15.04	1 POW-LED		yellow	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	
4.0011.15.05	1 POW-LED		red	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	
4.0011.15.06	1 POW-LED	400 mW/LED	blue	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	
4.0011.15.07	1 POW-LED		green	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	
VERSIONS: ONLY UNDERWATER OPERATION								
4.0011.15.09	1 Multichip POW-LED		RGB	all on 5 W	CC 350 mA	120° flood	UW, 6x0,5 qmm	



SURFACE SPOTLIGHT

4.0011.15



IP68

UNDERWATER | EXTERIOR

< Project

Rånåsfoss Bridge, Akershus, Norway

Ligthing designer: Erik Selmer; Client: Luminator AS

Power supplies Technical details see from page 234.

5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20

Constant Current power
supply,
max 3 spotlights

Constant Current power
supply,
3-6 spotlights

Constant Current power
supply,
5-12 spotlights

5.0635.09.16	5.0635.09.24	5.0635.09.50
RGB-Controller, max 4 spotlights	RGB-Controller, 5-8 spotlights	RGB-Controller, 5-12 spotlights

NOTE



SALINE version possible - Article number with additional „S“ at the end



POW-LED, series-connected

OPTIONS

Possible beam angle POW-LED

