

60m

8x3,5W
LED4x3,5W
LED

IP54

Malux
solutions

MX Safe Sign Cube 600

Modern, cubic luminaire housing made of anodized aluminum frame and folding upper part made of polycarbonate. The luminaire comes with three printed picto-gram panes and one opal pane. The product is of very rugged construction and quick to install.


The luminaire is equipped with 8 x 3.5 Watt (central power supply) or 4 x 3.5 Watt (self contained version) high-power LED technology.

The self contained version is not in line with DIN 4844-1.

Technical specifications

Visibility distance	60 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Aluminum anodized / sheet steel / polycarbonate
Type of assembly	Ceiling mounting (see accessories)
Dimensions (WxHxD)	655 x 385 x 65 mm
Protection class Safety class	IP54 II

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	8 x 3,5W LED-bar	4 x 3,5W LED-bar
Light current mains operation	4000lm	950lm
Luminous flux		
Emergency (DC) / mains	-	15% - 50% / 100%
Power consumption	35VA	18VA
Battery current input	145mA	-
Rated operating time		
Battery operation	-	1h / 3h / 8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h / 3h	-	4,8V 2,0Ah
NiMh-Akku 8h	-	4,8V 4,2Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

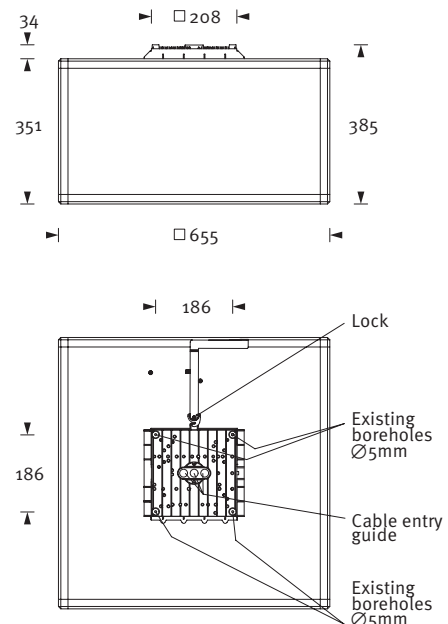

Accessories

Chain assembly set	Exit pictogram FR
Cable assembly set	Exit pictogram FL
	Exit pictogram FU
	Opal pane

* Panes included and already mounted.
Other pictograms available on request.