



IECEX Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: IECEx EPS 19.0014X

Issue No: 0

Certificate history:

Issue No. 0 (2019-08-02)

Status: **Current**

Page 1 of 3

Date of Issue: **2019-08-02**

Applicant: **i.safe MOBILE GmbH**
i_Park Tauberfranken 10
97922 Lauda-Koenigshofen
Germany

Equipment: **IS530.1 Intrinsically safe and multifunctional industrial smartphone**
Optional accessory:

Type of Protection: **intrinsic safety "I"**

Marking:

Ex ib IIC T4 Gb

Ex ib IIIC T135°C Db IP6X

*Approved for issue on behalf of the IECEx
Certification Body:*

Holger Schaffer


Position:

Certification Manager

*Signature:
(for printed version)*

Date:

2019-08-02

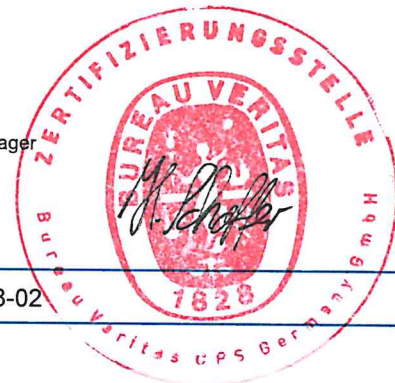

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

Bureau Veritas Consumer Products Services Germany GmbH
Businesspark A96
86842 Türkheim
Germany





IECEX Certificate of Conformity

Certificate No: IECEX EPS 19.0014X

Issue No: 0

Date of Issue: 2019-08-02

Page 2 of 3

Manufacturer: **i.safe MOBILE GmbH**
i_Park Tauberfranken 10
97922 Lauda-Koenigshofen
Germany

Additional Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended.

STANDARDS:

The apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

IEC 60079-0 : 2017 Explosive atmospheres - Part 0: Equipment - General requirements
Edition:7.0

IEC 60079-11 : 2011 Explosive atmospheres - Part 11: Equipment protection by intrinsic safety "i"
Edition:6.0

This Certificate does not indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in

Test Report:

DE/EPS/ExTR19.0013/00

Quality Assessment Report:

DE/EPS/QAR12.0003/05



IECEX Certificate of Conformity

Certificate No: IECEx EPS 19.0014X

Issue No: 0

Date of Issue: 2019-08-02

Page 3 of 3

Schedule

EQUIPMENT:

Equipment and systems covered by this certificate are as follows:

The intrinsically safe, multifunctional and rugged industrial smartphone IS530.1 has been designed for use in explosion hazardous areas of zone 1 and 21. It provides numerous technologies like 4G (LTE), NFC, GPS, Wi-Fi and Bluetooth LE. The IS530.1 is equipped with an Android operating system, large internal memory, amplified loudspeaker, replaceable battery pack and functional 13-pin ISM interface.

Electrical data:

Power supply:

The smartphone may only be used with the approved, intrinsically safe battery pack BPIS530.1 made by i.safe MOBILE GmbH.
LiPo battery $U_o = 3.8 \text{ V}$ ($U_{o_max} = 4.35 \text{ V}$) / 3.6 Ah / 13.68 Wh

It is permissible to charge the battery pack alone outside the device via an approved charging adapter.

Interfaces:

The device has a lateral magnetic charging port with which it can be charged outside hazardous areas via an approved charging adapter. The contacts are intrinsically safe for gas and dust.

Furthermore, the device has an USB interface (type C) for charging and data transmission outside hazardous areas. It is not permitted to open the USB interface cover in hazardous areas.

The ISM interface of the IS530.1 can be used within hazardous areas with approved headsets, Remote Speaker Microphones (RSM) and add-ons, marking the smartphone a multifunctional equipment for industrial applications. For ISM interface use, the i.safe MOBILE headset IS-HS1.1 or approved, intrinsically safe accessories may be used, which comply with the entity parameters of the ISM interface according to document 1029AD04. If the ISM interface is not used, it must be securely closed by the cover provided for this purpose.

SPECIFIC CONDITIONS OF USE: YES as shown below:

The battery may be charged outside explosion hazardous areas only.

The device must be protected against excessive UV light emission and high electrostatic charge processes.

The permitted ambient temperature range is $-20 \text{ }^\circ\text{C}$ to $+60 \text{ }^\circ\text{C}$.