

SENSPOT IP44 / IP65




Extra-compact LED downlight with detection

Design: agence PM design




New !
Vandal-resistant version
IK10+ 50J

Features:



- Impact-resistant flush-mounting spot
- Vandal-resistant version IK10+ 50 J: secure closure through Torx + pin screws
- White polyester lacquered zamak bezel RAL9016
- Clear polycarbonate diffuser
- White polycarbonate reflector
- CCT 4000 K, CRI min. 80
- Remote-control detector adjustment
- Separate power supply
- Suitable for outdoor environments (IP65)
- Connection type:
IP44 version: remote IP20 power supply
IP65 version: remote IP20 power supply in sealed box




- RAL9016 (standard ring colour)
- RAL7035 (other ring colours on request)
- RAL9005 (other ring colours on request)

Options available on request:

- LED 3000 K
- Square adaptor kit for replacing old Sécurilite downlight with a Senspot: **code 98403003**
- Round adaptor kit for replacing old Sécurilite downlight with a Senspot: **code 98403004**
- Back box for use in concrete - Senspot IP44 : **code 98403002**
- Back box for use in concrete - Senspot IP65 : **code 98403001**

- Radio remote control to be ordered separately
code: 9800 0010
- Torx + pin bit for vandal-resistant Senspot to be ordered separately.
Code: 9800 0012

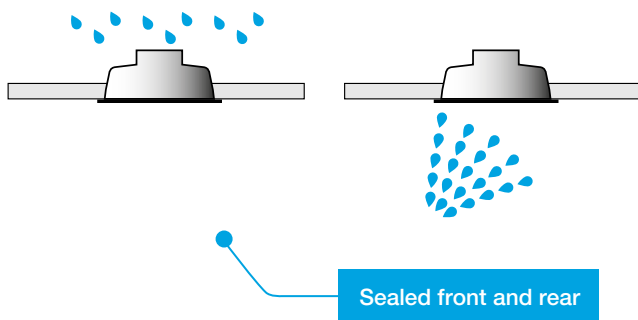

| LED modules | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | Standard code 20 J | Vandal-resistant code 50 J |
|-------------|-----------|-----------------------------|---------------------------|--------------------|----------------------------|
| LED 1700 | 12 | 1300 | 108 | 4030 04 .. | 4040 04 .. |
| LED 2200 | 16 | 1630 | 102 | 4031 04 .. | 4041 04 .. |

Lifetime: L80B50 / 50,000 h

SENSPOT LED IP44

| LED modules | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | Standard code 20 J | Vandal-resistant code 50 J |
|-------------|-----------|-----------------------------|---------------------------|--------------------|----------------------------|
| LED 1700 | 12 | 1300 | 108 | 4035 04 .. | 4045 04 .. |
| LED 2200 | 16 | 1630 | 102 | 4036 04 .. | 4046 04 .. |

Lifetime: L80B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 4030 04 ..


- 00 no detection
- 03 slave version + extinction or standby warning
- 21 DALI dimmable + switch dimming + standby warning
- 43 with Pro detection + remote-adjustable extinction or standby warning

Standard version



Flush-mounting dimensions:
ø 160

IP44 A : 33 mm
IP65 A : 70 mm

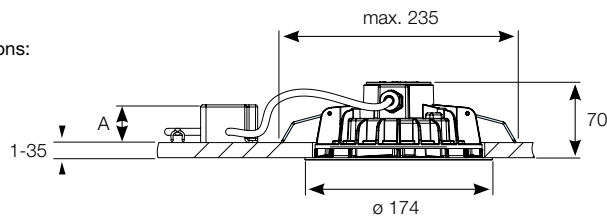


Vandal-resistant version



Flush-mounting dimensions:
ø 160

IP44 A : 33 mm
IP65 A : 70 mm

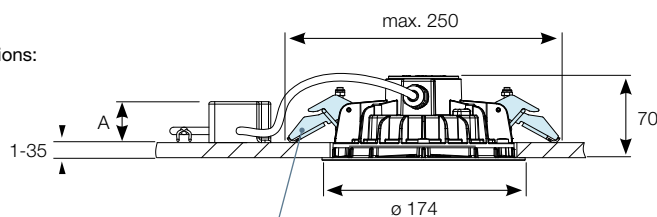

Rip-out resistant fastenings with
vandal-resistant screws

