


# TITAN



BVCert. 6037554

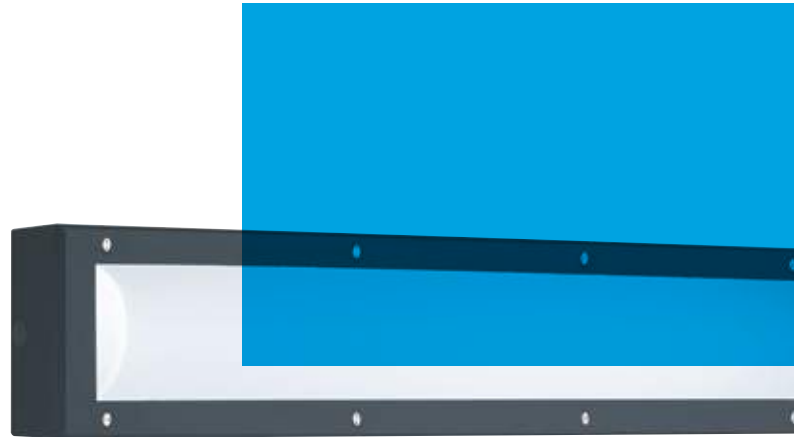


A range of elegant technical luminaires designed to withstand extreme vandalism in public spaces.

More light, less maintenance: the Titan is the long-life lighting solution that project owners and users of public spaces alike will find re-assuring!

↘ **Longer life**  
With LEDs and professional power supplies designed to last 50,000 hours.

↘ **Greater savings**  
Thanks to the LED fittings and lighting management systems: detection, dimming, etc.



- 1 Braced polycarbonate diffuser
- 2 Steel frame and base treated against corrosion, 2 mm thick
- 3 Seal compression chamber
- 4 Lip to prevent forced entry
- 5 Sliding, plug-in reflector gear tray
- 6 Anti-vibration pads
- 7 Supplied c/w sealing washers

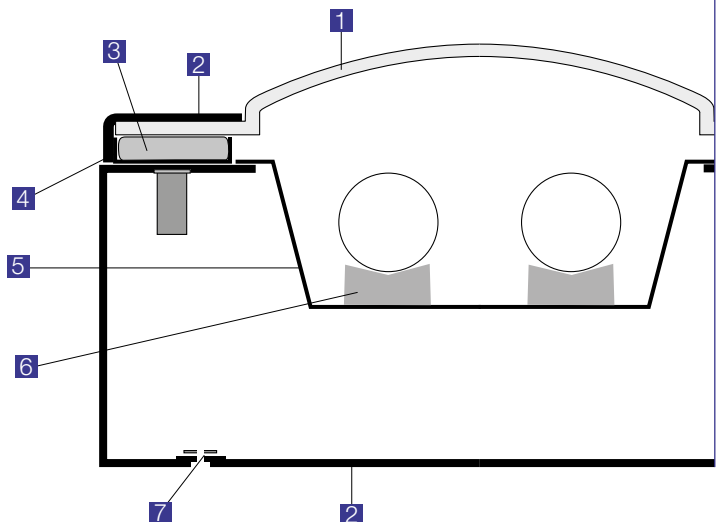

# TITAN COMPACT



A highly-compact architectural LED luminaire for circulation areas and public spaces subject to vandalism.

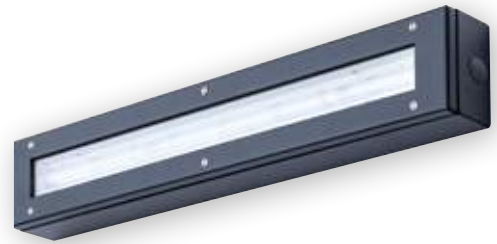

Features:

- Luminaire withstands extreme vandalism
- Wall or corner mounting versions: body and frame in ZP steel
- Flush-mounting version: body and frame in painted 304L stainless steel
- Polyester powder-coated finish
- Flat opal polycarbonate diffuser
- CCT 4000 K, CRI min. 80
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w IP66 cable seal

■ RAL7016

Options available on request:

- 3000 K LEDs
- 316L stainless steel version (wall and corner fittings)
- Light-control optics version




LED optics versions on request (UGR to be confirmed for each lighting project)


■ Vandal-resistant tool (bit) to be ordered separately code: 9800 0003




Titan Compact Wall code: 6401 1400




Titan Compact Flush code: 6425 1400



Titan Compact Angle code: 6411 1400



**NEW!**  
Flush version in Stainless steel  
See page 152




## TITAN COMPACT Wall mounted

**i direct 640**

220-240 V AC / 50/60 Hz   RoHS

Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
375	11	800	73	<b>6401 1400</b>
660	21	1800	86	<b>6402 1400</b>
945	31	2750	89	<b>6403 1400</b>
1230	43	3650	85	<b>6404 1400</b>

Lifetime: L90B50 / 50,000 h




## TITAN COMPACT Angle

**i direct 641**

220-240 V AC / 50/60 Hz   RoHS

Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
375	11	800	73	<b>6411 1400</b>
660	21	1800	86	<b>6412 1400</b>
945	31	2750	89	<b>6413 1400</b>
1230	43	3650	85	<b>6414 1400</b>

Lifetime: L90B50 / 50,000 h

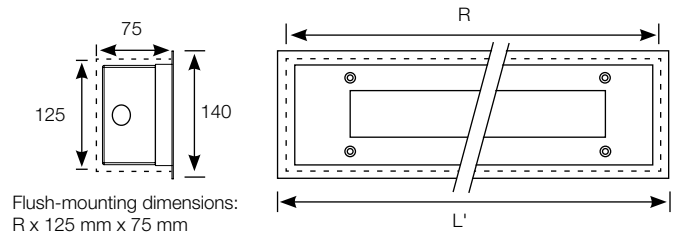

## TITAN COMPACT E

**direct 642**

220-240 V AC / 50/60 Hz RoHS

Aperture length R (mm)	Frame length L' (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
390	405	11	800	73	<b>6425 14..</b>
675	690	21	1800	86	<b>6426 14..</b>
960	975	31	2750	89	<b>6427 14..</b>
1245	1260	43	3650	85	<b>6428 14..</b>

Lifetime: L90B50 / 50,000 h

## Additional options Titan Compact

Coding:

add the corresponding suffix to the product code: e.g. **6425 1400** .....

- 9413** Flat Duroflam® diffuser
- 9601** Anti-graffiti protection
- 9702** stainless steel crosspoint screws (VK54)

*N.B.: through wiring possible on standard codes  
by piggy-backing on gear tray supply terminal block*