



Features

- Input voltage: 220–240 V, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 65
- IK: 10+/50 joules or IK10++/150 joules (depending on version)
- IRC 80
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C to NF EN 60598-1 standard
- VK56 angle mounted, VK55 surface mounted, VK56 ceiling mounted
- SDCM (Standard Deviation Colour Matching): 3
- LED module life > 50,000 hr (L90B50)
- Photobiological hazard: RG0

Applications

- Decorative strip luminaire for indoor and outdoor environments subject to moderate and severe vandalism
- Conditions of use:
 - Models with detection: suitable for indoor use
 - Installation positions: refer to installation instructions

Materials

- Body: 4 mm thick marine-grade 6060 aluminium
- Reinforced end caps in PC (50 joules) or aluminium (150 joules)
- Diffuser: opal polycarbonat
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/CE and amendments

Colours / Finish

- Colour: anodized aluminium Qualanod 20 µ

Wiring

- Supply terminal block: automatic dual-entry for 3 x 1.5 mm² conductors

Fixings

- Diffuser closed using M5 stainless fixing screws with 2-point tamper-proof heads and captive washers

*Technical and dimensional data are given for information only and may be modified at any time without notice.
Please enquire before ordering.*

Facilities available

- Stainless crosspoint screws (VK54) add the suffix **9702** to the product code – example: 6500 9400 **9702**

Accessories

(to be ordered separately)

- M5 bit for 2-point tamper-proof screws – code: **9800 0003**
- Bit-holder screwdriver – code: **98000 0005**

Approvals


Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)
- Eligible for the BAR-EQ-110 energy economy certificate for detection versions
- Eligible for the BAR-EQ-127 (except 1 x 1 module version)

Dimensions


Angle mounted

Version angle :

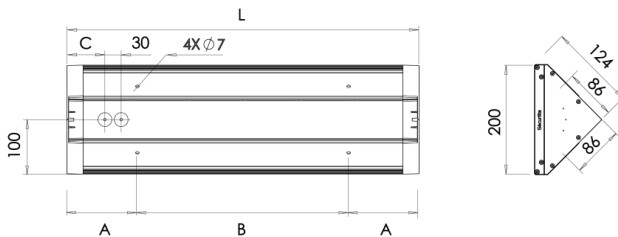

Surface mounted

Version applique :

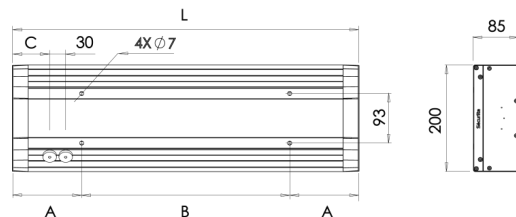

A, B and C: refer to notice [\(NOT0655\)](#)

*Technical and dimensional data are given for information only and may be modified at any time without notice.
Please enquire before ordering.*

LED									
Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	11	370	900	81,8	65009300	66009300	65309300	66309300
Urbaline 1x1 module	4000	11	370	1000	90,9	65009400	66009400	65309400	66309400
Urbaline 1x2 modules	3000	21	650	2200	104,8	65019300	66019300	65319300	66319300
Urbaline 1x2 modules	4000	21	650	2300	109,5	65019400	66019400	65319400	66319400
Urbaline 1x3 modules	3000	31	930	3300	106,5	65029300	66029300	65329300	66329300
Urbaline 1x3 modules	4000	31	930	3400	109,7	65029400	66029400	65329400	66329400
Urbaline 1x4 modules	3000	43	1210	4400	102,3	65039300	66039300	65339300	66339300
Urbaline 1x4 modules	4000	43	1210	4600	107	65039400	66039400	65339400	66339400
Urbaline 2x1 module	3000	17	370	1900	111,8	65049300	66049300	65349300	66349300
Urbaline 2x1 module	4000	17	370	2000	117,6	65049400	66049400	65349400	66349400
Urbaline 2x2 modules	3000	43	650	4400	102,3	65059300	66059300	65359300	66359300
Urbaline 2x2 modules	4000	43	650	4600	107	65059400	66059400	65359400	66359400
Urbaline 2x3 modules	3000	62	930	6600	106,5	65069300	66069300	65369300	66369300
Urbaline 2x3 modules	4000	62	930	6900	111,3	65069400	66069400	65369400	66369400
Urbaline 2x4 modules	3000	70	1210	7700	110	65079300	66079300	65379300	66379300
Urbaline 2x4 modules	4000	70	1210	8000	114,3	65079400	66079400	65379400	66379400

LED + Pro detection - technical specifications and conditions of use for detection (NOT0410): www.securlite.com (NOT0410)									
Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	435	900	75	65009312	66009312	65309312	66309312
Urbaline 1x1 module	4000	12	435	1000	83,3	65009412	66009412	65309412	66309412
Urbaline 1x2 modules	3000	22	715	2200	100	65019312	66019312	65319312	66319312
Urbaline 1x2 modules	4000	22	715	2300	104,5	65019412	66019412	65319412	66319412
Urbaline 1x3 modules	3000	32	995	3300	103,1	65029312	66029312	65329312	66329312
Urbaline 1x3 modules	4000	32	995	3400	106,3	65029412	66029412	65329412	66329412
Urbaline 1x4 modules	3000	44	1275	4400	100	65039312	66039312	65339312	66339312
Urbaline 1x4 modules	4000	44	1275	4600	104,5	65039412	66039412	65339412	66339412
Urbaline 2x1 module	3000	18	435	1900	105,6	65049312	66049312	65349312	66349312
Urbaline 2x1 module	4000	18	435	2000	111,1	65049412	66049412	65349412	66349412
Urbaline 2x2 modules	3000	44	715	4400	100	65059312	66059312	65359312	66359312
Urbaline 2x2 modules	4000	44	715	4600	104,5	65059412	66059412	65359412	66359412
Urbaline 2x3 modules	3000	63	995	6600	104,8	65069312	66069312	65369312	66369312
Urbaline 2x3 modules	4000	63	995	6900	109,5	65069412	66069412	65369412	66369412
Urbaline 2x4 modules	3000	71	1275	7700	108,5	65079312	66079312	65379312	66379312
Urbaline 2x4 modules	4000	71	1275	8000	112,7	65079412	66079412	65379412	66379412

Technical and dimensional data are given for information only and may be modified at any time without notice.
Please enquire before ordering.

LED with Pro detection + extinction warning *technical specifications and conditions of use for detection (NOT0410): www.securlite.com (NOT0410)*

Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	435	900	75	65009314	66009314	65309314	66309314
Urbaline 1x1 module	4000	12	435	1000	83,3	65009414	66009414	65309414	66309414
Urbaline 1x2 modules	3000	22	715	2200	100	65019314	66019314	65319314	66319314
Urbaline 1x2 modules	4000	22	715	2300	104,5	65019414	66019414	65319414	66319414
Urbaline 1x3 modules	3000	32	995	3300	103,1	65029314	66029314	65329314	66329314
Urbaline 1x3 modules	4000	32	995	3400	106,3	65029414	66029414	65329414	66329414
Urbaline 1x4 modules	3000	44	1275	4400	100	65039314	66039314	65339314	66339314
Urbaline 1x4 modules	4000	44	1275	4600	104,5	65039414	66039414	65339414	66339414
Urbaline 2x1 module	3000	18	435	1900	105,6	65049314	66049314	65349314	66349314
Urbaline 2x1 module	4000	18	435	2000	111,1	65049414	66049414	65349414	66349414
Urbaline 2x2 modules	3000	44	715	4400	100	65059314	66059314	65359314	66359314
Urbaline 2x2 modules	4000	44	715	4600	104,5	65059414	66059414	65359414	66359414
Urbaline 2x3 modules	3000	63	995	6600	104,8	65069314	66069314	65369314	66369314
Urbaline 2x3 modules	4000	63	995	6900	109,5	65069414	66069414	65369414	66369414
Urbaline 2x4 modules	3000	71	1275	7700	108,5	65079314	66079314	65379314	66379314
Urbaline 2x4 modules	4000	71	1275	8000	112,7	65079414	66079414	65379414	66379414

LED with Pro detection + standby warning *technical specifications and conditions of use for detection (NOT0410): www.securlite.com (NOT0410)*

Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	435	900	75	65009315	66009315	65309315	66309315
Urbaline 1x1 module	4000	12	435	1000	83,3	65009415	66009415	65309415	66309415
Urbaline 1x2 modules	3000	22	715	2200	100	65019315	66019315	65319315	66319315
Urbaline 1x2 modules	4000	22	715	2300	104,5	65019415	66019415	65319415	66319415
Urbaline 1x3 modules	3000	32	995	3300	103,1	65029315	66029315	65329315	66329315
Urbaline 1x3 modules	4000	32	995	3400	106,3	65029415	66029415	65329415	66329415
Urbaline 1x4 modules	3000	44	1275	4400	100	65039315	66039315	65339315	66339315
Urbaline 1x4 modules	4000	44	1275	4600	104,5	65039415	66039415	65339415	66339415
Urbaline 2x1 module	3000	18	435	1900	105,6	65049315	66049315	65349315	66349315
Urbaline 2x1 module	4000	18	435	2000	111,1	65049415	66049415	65349415	66349415
Urbaline 2x2 modules	3000	44	715	4400	100	65059315	66059315	65359315	66359315
Urbaline 2x2 modules	4000	44	715	4600	104,5	65059415	66059415	65359415	66359415
Urbaline 2x3 modules	3000	63	995	6600	104,8	65069315	66069315	65369315	66369315
Urbaline 2x3 modules	4000	63	995	6900	109,5	65069415	66069415	65369415	66369415
Urbaline 2x4 modules	3000	71	1275	7700	108,5	65079315	66079315	65379315	66379315
Urbaline 2x4 modules	4000	71	1275	8000	112,7	65079415	66079415	65379415	66379415

LED with Pro detection + radio-control technical specifications and conditions of use for detection (NOT0420): www.securlite.com (NOT0420)

Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	435	900	75	65009316	66009316	65309316	66309316
Urbaline 1x1 module	4000	12	435	1000	83,3	65009416	66009416	65309416	66309416
Urbaline 1x2 modules	3000	22	715	2200	100	65019316	66019316	65319316	66319316
Urbaline 1x2 modules	4000	22	715	2300	104,5	65019416	66019416	65319416	66319416
Urbaline 1x3 modules	3000	32	995	3300	103,1	65029316	66029316	65329316	66329316
Urbaline 1x3 modules	4000	32	995	3400	106,3	65029416	66029416	65329416	66329416
Urbaline 1x4 modules	3000	44	1275	4400	100	65039316	66039316	65339316	66339316
Urbaline 1x4 modules	4000	44	1275	4600	104,5	65039416	66039416	65339416	66339416
Urbaline 2x1 module	3000	18	435	1900	105,6	65049316	66049316	65349316	66349316
Urbaline 2x1 module	4000	18	435	2000	111,1	65049416	66049416	65349416	66349416
Urbaline 2x2 modules	3000	44	715	4400	100	65059316	66059316	65359316	66359316
Urbaline 2x2 modules	4000	44	715	4600	104,5	65059416	66059416	65359416	66359416
Urbaline 2x3 modules	3000	63	995	6600	104,8	65069316	66069316	65369316	66369316
Urbaline 2x3 modules	4000	63	995	6900	109,5	65069416	66069416	65369416	66369416
Urbaline 2x4 modules	3000	71	1275	7700	108,5	65079316	66079316	65379316	66379316
Urbaline 2x4 modules	4000	71	1275	8000	112,7	65079416	66079416	65379416	66379416

LED slave version + extinction warning

Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	435	900	75	65009304	66009304	65309304	66309304
Urbaline 1x1 module	4000	12	435	1000	83,3	65009404	66009404	65309404	66309404
Urbaline 1x2 modules	3000	22	715	2200	100	65019304	66019304	65319304	66319304
Urbaline 1x2 modules	4000	22	715	2300	104,5	65019404	66019404	65319404	66319404
Urbaline 1x3 modules	3000	32	995	3300	103,1	65029304	66029304	65329304	66329304
Urbaline 1x3 modules	4000	32	995	3400	106,3	65029404	66029304	65329404	66329404
Urbaline 1x4 modules	3000	44	1275	4400	100	65039304	66039404	65339304	66339304
Urbaline 1x4 modules	4000	44	1275	4600	104,5	65039404	66039404	65339404	66339404
Urbaline 2x1 module	3000	18	435	1900	105,6	65049304	66049304	65349304	66349304
Urbaline 2x1 module	4000	18	435	2000	111,1	65049404	66049404	65349404	66349404
Urbaline 2x2 modules	3000	44	715	4400	100	65059304	66059304	65359304	66359304
Urbaline 2x2 modules	4000	44	715	4600	104,5	65059404	66059404	65359404	66359404
Urbaline 2x3 modules	3000	63	995	6600	104,8	65069304	66069304	65369304	66369304
Urbaline 2x3 modules	4000	63	995	6900	109,5	65069404	66069404	65369404	66369404
Urbaline 2x4 modules	3000	71	1275	7700	108,5	65079304	66079304	65379304	66379304
Urbaline 2x4 modules	4000	71	1275	8000	112,7	65079404	66079404	65379404	66379404

LED slave version + stand-by warning

Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	435	900	75	65009305	66009305	65309305	66309305
Urbaline 1x1 module	4000	12	435	1000	83,3	65009405	66009405	65309405	66309405
Urbaline 1x2 modules	3000	22	715	2200	100	65019305	66019305	65319305	66319305
Urbaline 1x2 modules	4000	22	715	2300	104,5	65019405	66019405	65319405	66319405
Urbaline 1x3 modules	3000	32	995	3300	103,1	65029305	66029305	65329305	66329305
Urbaline 1x3 modules	4000	32	995	3400	106,3	65029405	66029405	65329405	66329405
Urbaline 1x4 modules	3000	44	1275	4400	100	65039305	66039305	65339305	66339305
Urbaline 1x4 modules	4000	44	1275	4600	104,5	65039405	66039405	65339405	66339405
Urbaline 2x1 module	3000	18	435	1900	105,6	65049305	66049305	65349305	66349305
Urbaline 2x1 module	4000	18	435	2000	111,1	65049405	66049405	65349405	66349405
Urbaline 2x2 modules	3000	44	715	4400	100	65059305	66059305	65359305	66359305
Urbaline 2x2 modules	4000	44	715	4600	104,5	65059405	66059405	65359405	66359405
Urbaline 2x3 modules	3000	63	995	6600	104,8	65069305	66069305	65369305	66369305
Urbaline 2x3 modules	4000	63	995	6900	109,5	65069405	66069405	65369405	66369405
Urbaline 2x4 modules	3000	71	1275	7700	108,5	65079305	66079305	65379305	66379305
Urbaline 2x4 modules	4000	71	1275	8000	112,7	65079405	66079405	65379405	66379405

LED DALI dimmable + switch dimming + standby warning									
Designation	CCT (K)	Power (W)	Lenght L (mm)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	SURFACE mounting 50J	ANGLE mounting 50J	SURFACE mounting 150J	ANGLE mounting 150J
Urbaline 1x1 module	3000	12	370	900	75	65009321	66009321	65309321	66309321
Urbaline 1x1 module	4000	12	370	1000	83,3	65009421	66009421	65309421	66309421
Urbaline 1x2 modules	3000	22	650	2200	100	65019321	66019321	65319321	66319321
Urbaline 1x2 modules	4000	22	650	2300	104,5	65019421	66019421	65319421	66319421
Urbaline 1x3 modules	3000	32	930	3300	103,1	65029321	66029321	65329321	66329321
Urbaline 1x3 modules	4000	32	930	3400	106,3	65029421	66029421	65329421	66329421
Urbaline 1x4 modules	3000	44	1210	4400	100	65039321	66039321	65339321	66339321
Urbaline 1x4 modules	4000	44	1210	4600	104,5	65039421	66039421	65339421	66339421
Urbaline 2x1 module	3000	18	370	1900	105,6	65049321	66049321	65349321	66349321
Urbaline 2x1 module	4000	18	370	2000	111,1	65049421	66049421	65349421	66349421
Urbaline 2x2 modules	3000	44	650	4400	100	65059321	66059321	65359321	66359321
Urbaline 2x2 modules	4000	44	650	4600	104,5	65059421	66059421	65359421	66359421
Urbaline 2x3 modules	3000	63	930	6600	104,8	65069321	66069321	65369321	66369321
Urbaline 2x3 modules	4000	63	930	6900	109,5	65069421	66069421	65369421	66369421
Urbaline 2x4 modules	3000	71	1210	7700	108,5	65079321	66079321	65379321	66379321
Urbaline 2x4 modules	4000	71	1210	8000	112,7	65079421	66079421	65379421	66379421