

URBALINE



BVCert. 6037554


Vandal-resistant luminaire for public spaces, buildings, and transport.

URBALINE is a new LED luminaire vandal-resistant up to 150 joules (IK10⁺⁺) and marine corrosion resistant thanks to its treatment approved to the Qualanod quality mark, Class 20.

Particularly suitable for public transport infrastructures (stations, pedestrian subways, etc.) as well as public spaces and buildings requiring reinforced protection, Urbaline make it possible to provide precise illumination while reducing energy consumption, thanks to its latest-generation LED modules.

Lighting management is optimized via optional functions like DALI dimming, switch dimming, and detection with warning and standby (consumption less than 0.5 W in standby).

Recyclable and employing recycled materials, it is upgradeable thanks to its plug-in repairable components.

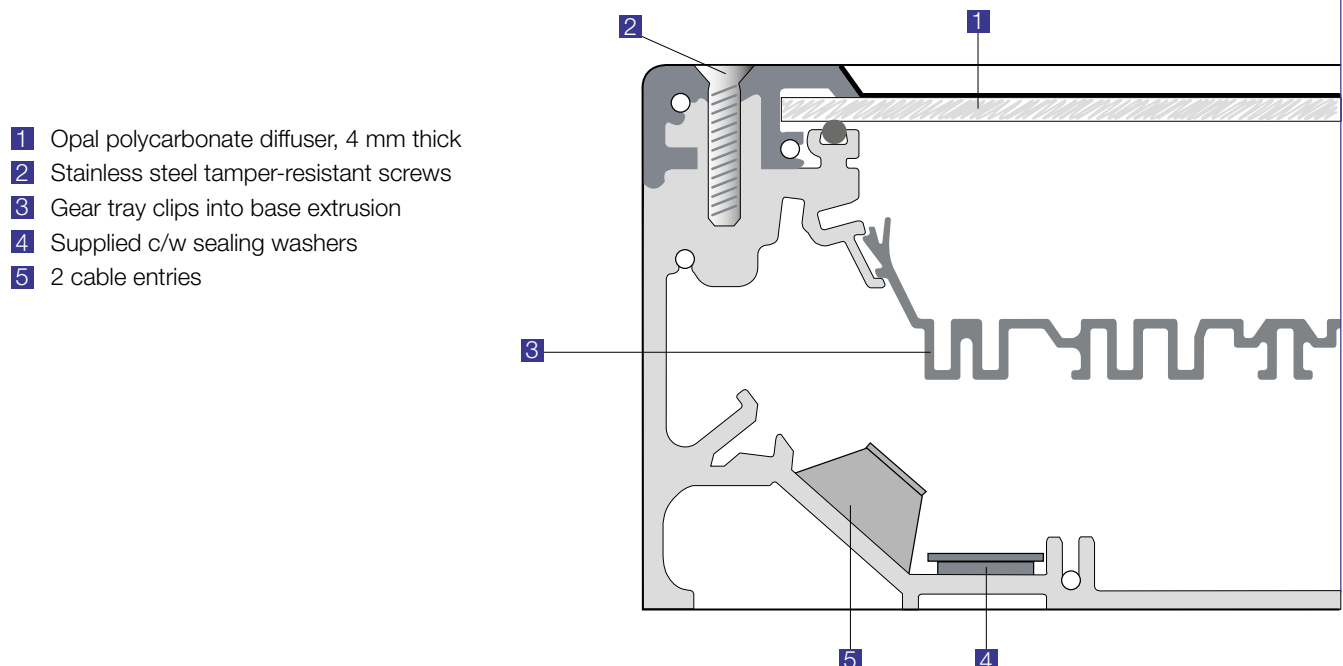

- 1 Opal polycarbonate diffuser, 4 mm thick
- 2 Stainless steel tamper-resistant screws
- 3 Gear tray clips into base extrusion
- 4 Supplied c/w sealing washers
- 5 2 cable entries

URBALINE



An elegant luminaire designed to withstand marine corrosion and extreme vandalism in public spaces and railway premises.



Urbaline



Urbaline Angle

Aluminium end caps



Polycarbonate end caps



Features:

- Body: 4 mm thick marine-grade 6060 aluminium
- Qualanod 20 µ anodizing
- Reinforced end caps in PC (50 joules) or aluminium (150 joules)
- Opal polycarbonate diffuser
- Linear LED module
- CCT 4000 K, CRI min. 80
- Stainless steel vandal-resistant screws


Options available on request:

- Version with emergency pack
- 3000 K LEDs


Applications:

- Public transport infrastructures (stations, pedestrian subways, etc.)
- Public spaces and buildings requiring increased protection

Urbaline - code: 6506 9400




Urbaline Angle
code: 6602 9400



Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003

Radio remote control to be ordered separately
code: 9800 0010

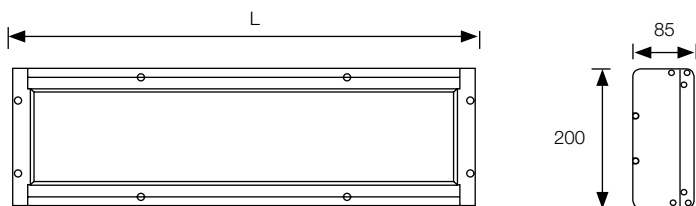

URBALINE LED (wall mounting)

i direct 650

220-240 V AC / 50/60 Hz   RoHS

Length L (mm)	Length with detection L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code 50 J	Code 150 J
370	435	11	900	82	6500 94--	6530 94--
		17	1800	106	6504 94--	6534 94--
650	715	21	2050	98	6501 94--	6531 94--
		43	4150	97	6505 94--	6535 94--
930	995	31	3100	100	6502 94--	6532 94--
		62	6250	145	6506 94--	6536 94--
1210	1275	43	4150	97	6503 94--	6533 94--
		70	7250	104	6507 94--	6537 94--

Lifetime: L90B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. **6500 94 --**


- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning
- 12** with Pro detection
- 14** with Pro detection + extinction warning
- 15** with Pro detection + standby warning
- 16** with Pro detection + radio-control
- 04** slave version + extinction warning
- 05** slave version + standby warning

Additional options Urbaline wall-mounting

Coding:

add the corresponding suffix to the product code: e.g. **6500 9400 ----**

- 9702** stainless steel crosspoint screws (VK54)

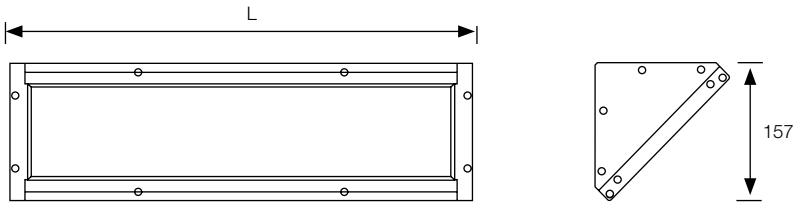

URBALINE LED (angle)

i direct 660

220-240 V AC / 50/60 Hz RoHS

Length L (mm)	Length with detection L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code 50 J	Code 150 J
370	435	11	900	82	6600 94--	6630 94--
		17	1800	106	6604 94--	6634 94--
650	715	21	2050	98	6601 94--	6631 94--
		43	4150	97	6605 94--	6635 94--
930	995	31	3100	100	6602 94--	6632 94--
		62	6250	145	6606 94--	6636 94--
1210	1275	43	4150	97	6603 94--	6633 94--
		70	7250	104	6607 94--	6637 94--

Lifetime: L90B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. **6600 94 --**

- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning
- 12** with Pro detection
- 14** with Pro detection + extinction warning
- 15** with Pro detection + standby warning
- 16** with Pro detection + radio-control
- 04** slave version + extinction warning
- 05** slave version + standby warning

Additional options Urbaline angle

Coding:

add the corresponding suffix to the product code: e.g. **6600 9400 ----**

- 9702** stainless steel crosspoint screws (VK54)