



Trumpet shaped cable gland

Technical data

Ex-e Trumpet shaped cable gland

| | |
|--|--|
| Marking accd. to 94/9/EC | ⊕ II 2 G Ex e II / ⊕ II 2 D Ex tD A21 IP66 |
| EC-Type Examination Certificate | PTB 00 ATEX 3121 |
| IEC-Ex Certificate of Conformity | IECEX BK1 08.0007 |
| Marking accd. to IECEx | Ex e II / Ex tD A21 IP66 T85°C |
| Permissible ambient temperature | -40 °C up to +85 °C |
| Degree of protection accd. to EN 60529 | IP66 |
| Enclosure material | Polyamide |


Ordering details

| Thread | A/C mm | L mm | E mm | Ø Cable mm | A/F mm | Weight approx. kg | OU | Order No. |
|--|-----------|---------|---------|---------------|-----------|----------------------|----|---------------------------|
| Ordering details Trumpet shaped cable gland | | | | | | | | |
| M20 x 1.5 | 47 | 64 | 15 | 8 – 13 | 27 | 0.057 | 10 | GHG 960 1949 R0111 |
| M25 x 1.5 | 51 | 65 | 15 | 11 – 16 | 32 | 0.070 | 10 | GHG 960 1949 R0112 |
| M32 x 1.5 | 68 | 80 | 15 | 15 – 20 | 41 | 0.140 | 10 | GHG 960 1949 R0113 |
| M40 x 1.5 | 81 | 86 | 15 | 19 – 27 | 50 | 0.194 | 10 | GHG 960 1949 R0114 |
| M50 x 1.5 | 96 | 95 | 16 | 28 – 34 | 60 | 0.333 | 1 | GHG 960 1949 R0115 |
| M63 x 1.5 | 107 | 105 | 16 | 38 – 46 | 75 | 0.742 | 1 | GHG 960 1949 R0116 |

The order No. will show 1 pcs.

Please note that only order units (OU) can be ordered.

Dimension drawing

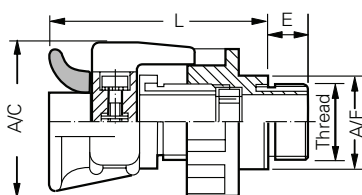

Trumpet shaped cable gland