

Ex II Signalling Hooter mHP 11

High-volume signalling device for applications in zones 1 and 2



Overview

The mHP 11 Ex Signalling Hooter is designed for warning purposes in potentially explosive areas of zones 1 and 2. The hooter is available with the common supply voltages and produces a sound level of approx. 108 dB(A).

The device is driven by a powerful, non-polarized electromagnet with an adjustable tappet that hits the membrane 100 to 120 times per second. The DC version additionally comprises an electronic circuit breaker.

Features

- Ingress protection IP 54
- Protection class II
- Protection type: II 2 G Ex e mb IIC T5 Gb
- Volume: approx. 108 dB(A)
- Cable gland M20 x 1.5

EATON

Powering Business Worldwide





Certification

Protection type II 2 G Ex e mb IIC T5 Gb



Specifications

Housing	Polycarbonat
Colour	Black
Ingress protection	IP 54 according to IEC 60529
Protection class	II
Cable gland	M20 x 1,5
Connection terminals	Terminal capacity 2,5 mm ²
Operating conditions	Indoors and outdoors
Operating position	Sound outlet facing downward
Duty cycle	ED 75 %
Volume	Approx. 108 dB(A), in 1 m distance
Temperature range	
Operation	DC model: -20 °C to +60 °C AC model: -20 °C to +50 °C
Storage	-40 °C to +80 °C
Weight	ca. 1.2 kg

General arrangement drawing (all dimensions in mm)

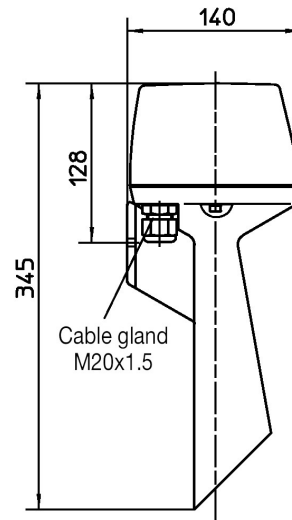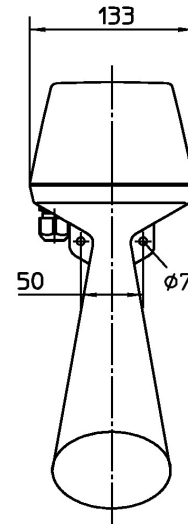

Wiring plan



Ordering data

Type	Designation	Temperature class	Input voltage	Current consumption	Art. No.*
mHP 11	Signalling Hooter with cable gland	T5	24 VDC	0.3 A	FHF 401 020 111 210
mHP 11	Signalling Hooter with cable gland	T5	115 VAC	0.15 A	FHF 401 020 111 206
mHP 11	Signalling Hooter with cable gland	T5	230 VAC	0.07 A	FHF 401 060 111 207

* All models are certified according to ATEX IECEx. INMETRO variants are available on request.

EATON
Powering Business Worldwide

FHF Funke + Huster Fernsig GmbH
Gewerbeallee 15-19
D-45478 Mülheim an der Ruhr
Phone +49-208-82 68-0
Telefax +49-208-82 68-286
<http://www.fhf.de>
e-mail: info@fhf.de

© 2017 Eaton
All rights reserved.
Publication No. DSFH048EN/A
September 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.